


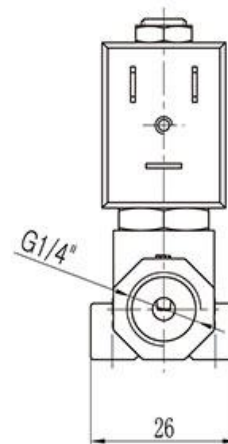
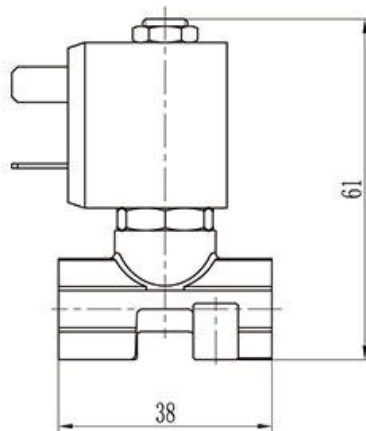
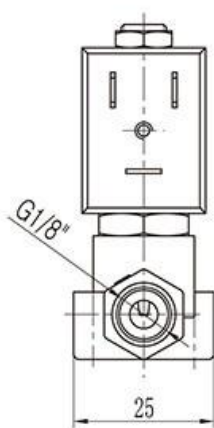


1			2	3	4	5	6	7	8
Ac13			Coil Types	Voltage	Seal Material	Body Material	Pipe Size	Orifice	Options
A	C	13	D	A20	N	31	01	01	
A: Direct Acting	C: Normally Closed	13: Series	D=Din Standard Connections, Fully Encapsulated	A24=AC24V A36=AC36V A48=AC48V A10=AC110V A20=AC220V D12=DC12V D24=DC24V D36=DC36V	N=NBR V=VITON E=EPDM	31=Forged Brass 32=304	01=1/8" 02=1/4"	01=1.0 02=2.0 R2=1.5 R3=2.5	N=NPT Other threads can be customized

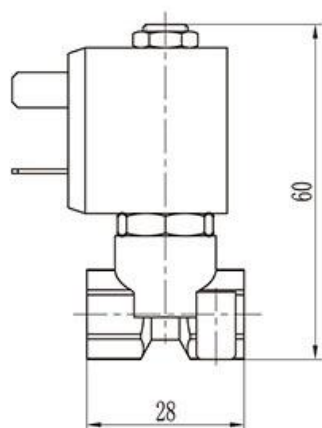

characteristic:

- 1、2/2-way Direct Acting、Open when energized, closed when de-energized
- 2、Automatic control of neutral gases and liquids
- 3、Small volume, large flow, simple structure

Control: Direct Acting

Body Material: Brass、Stainless steel

304(316 can be customized)

Maximum Pressure Resistance: 30bar Maximum

Work Pressure: 0~20bar

Ambient Temperature: 0℃~65℃

Install: Flow as the arrow,Horizontal installation

Standard Voltage: AC: 220V/50HZ 240/60HZ,

AC110V,DC24V, 12V……

Voltage fluctuations: +10%~-10%

Protection Level: IP65 100%ED

Seal: NBR(N)、EPDM(E)、VITON(V)

Electrical connection: Standard Connections (PG11)

Lead Wires (Optional)

Medium viscosity: 20cst

Medium: neutral gases and liquids

Medium Temperature: NBR (-10~+80℃)

EPDM (-30~+130℃)

VITON (-20~+150℃)



Valve Selection Lis

Pipe Size G	Orifice mm	CV rate	Pressure (bar)				Coil Type	Power		Externsions Dimensions L x W x H	Weight KG	Model Code 220VAC 50/60HZ
			Air Gas		liquid		To confi gure	AC 220V	DC 24V			
			AC	DC	AC	DC						
18"	1.0	0.05	0-20	0-15	0-20	0-15	D	6	6	28×25×60	0.13	AC13DA20N310101
	1.5	0.07	0-16	0-13	0-16	0-13	D	12	12	28×25×60	0.13	AC13DA20N3101R2
	2.0	0.13	0-13	0-10	0-13	0-10	D	12	12	28×25×60	0.13	AC13DA20N310102
	2.5	0.17	0-10	0-6	0-10	0-6	D	12	12	28×25×60	0.13	AC13DA20N3101R3
14"	1.0	0.05	0-20	0-15	0-20	0-15	D	12	12	38×26×61	0.14	AC13DA20N310201
	1.5	0.07	0-16	0-13	0-16	0-13	D	12	12	38×26×61	0.14	AC13DA20N3102R2
	2.0	0.13	0-13	0-10	0-13	0-10	D	12	12	38×26×61	0.14	AC13DA20N310202
	2.5	0.17	0-10	0-6	0-10	0-6	D	12	12	38×26×61	0.14	AC13DA20N3102R3