


1			2	3	4	5	6	7	8
CC41			Coil Types	Voltage	Seal Material	Body Material	Pipe Size	Orifice	Options
C	C	41	D	A20	T	31	03	15	
C: Direct Acting	C : Normally Closed	41: Series	D=Din Standard Connections, Fully Encapsulated	A24=AC24V A36=AC36V A48=AC48V A10=AC110V A20=AC220V D12=DC12V D24=DC24V D36=DC36V	N=NBR E=EPDM V=VITON K=PEEK	31=Forged Brass 32=304	02=1/4" 03=3/8" 04=1/2" 05=3/4" 06=1"	08=8.0 15=15.0 20=20.0 25=25.0	L=Neon Lamp J=External cooling module D=Timer N=NPT Other threads can be customized

external dimension

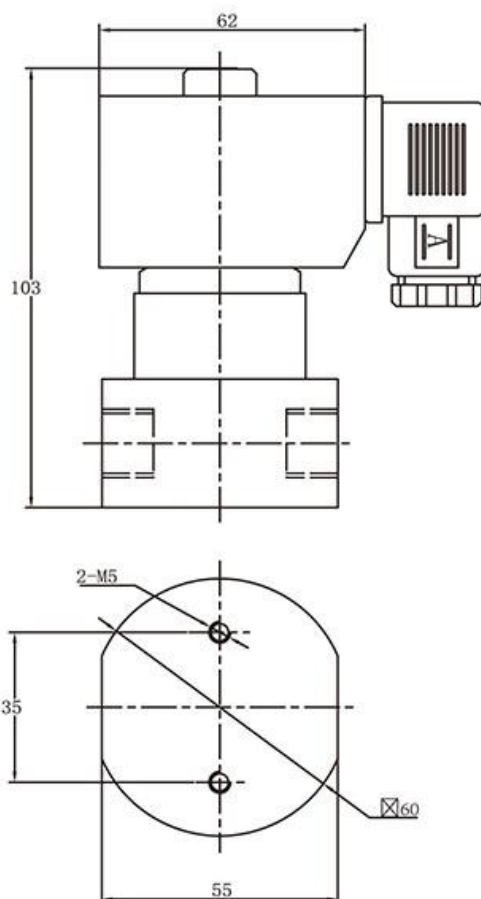

CC41-8(1/4 - 1/2)


Product Characteristics

1. 2-Way normally dosed solenoid valve;
Closed when de-energized, open when energized.
2. Special design, Serialized products .small in size .
large flow rate.widely use.
3. Body material: SS304.
4. Ambient Temp. 0°C-65°C; Fluids Temp: 0°C-110°C.
5. Flow as the arrow .mounts in any position :Best position
is Solenoid vertical and upright diriction.
6. Voltage: 220VAC /230VAC/380VAC/50/60HZ 24VDC;
Voltage Tolerance: +10% to -10% applicable voltage;
Coil can fix Germany Nass Coil.




Valve Selection Lis

Pipe Size G	Orifice mm	CV rate	Pressure (bar)				Coil Type	Power		Externsions Dimensions L x W x H	Weight KG	Model Code 220VAC 50/60HZ
			Air Gas		liquid		To confi gure	AC	DC			
			AC	DC	AC	DC		220V	24V			
1/4"	8.0	3.1	1-150	1-150	1-150	1-150	D	22	20	57×39.5×97	0.65	CC41DA20K310208
	8.0	1.2	0.5-90	0.5-70	0.5-90	0.5-70	D	35(rectifier)		55×60×103	1.26	CC41DA20N320208
3/8"	8.0	3.1	1-150	1-150	1-150	1-150	D	22	20	57×39.5×97	0.63	CC41DA20K310308
	8.0	1.2	0.5-90	0.5-70	0.5-90	0.5-70	D	35(rectifier)		55×60×103	1.24	CC41DA20N320308
	15	4.2	1-75	1-55	1-75	1-55	D	33	25	75×52×130	1.45	CC41DA20K310315
	15	4.2	1-75	1-55	1-75	1-55	D	33	25	75×52×130	1.45	CC41DA20N320315
1/2"	8.0	1.2	0.5-90	0.5-70	0.5-90	0.5-70	D	35(rectifier)		55×60×103	1.21	CC41DA20N320408
	15	4.2	1-75	1-55	1-75	1-55	D	33	25	75×52×130	1.4	CC41DA20N310415
	15	4.2	1-75	1-55	1-75	1-55	D	33	25	75×52×130	1.4	CC41DA20N320415
3/4"	20	7	1-65	1-50	1-65	1-50	D	33	25	85×60×141	1.7	CC41DA20N310520
	20	7	1-65	1-50	1-65	1-50	D	33	25	85×60×141	1.7	CC41DA20N320520
1"	25	11	1-55	1-45	1-55	1-45	D	33	25	100×70×148	2.1	CC41DA20N310625
	25	11	1-55	1-45	1-55	1-45	D	33	25	100×70×148	2.1	CC41DA20N320625

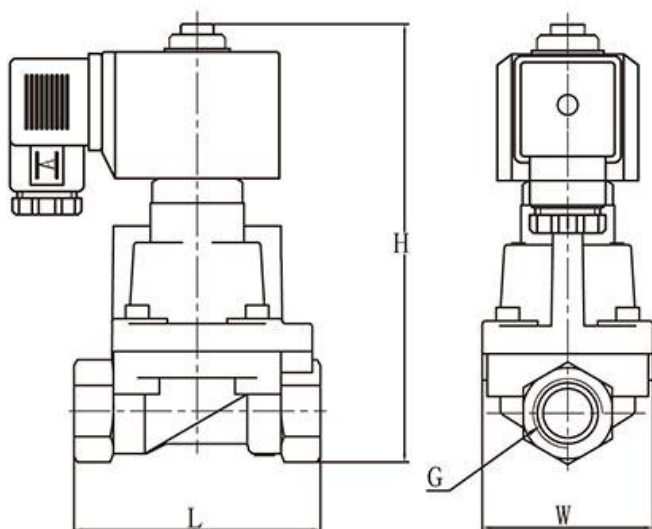

MODEL	L	W	H	G
CC41-15	75	52	130	3/8"
	75	52	130	1/2"
CC41-20	85	60	141	3/4"
CC41-25	100	70	148	1"

CC41-15~CC4125

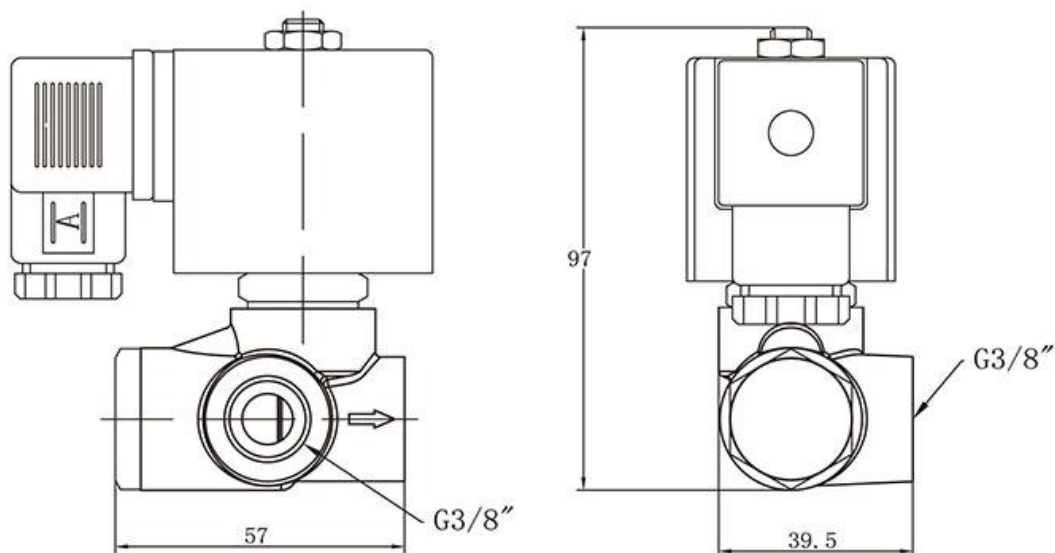

CC41-8(3/8)PEEK