



1		2	3	4	5	6	7	8
D63		Coil Types	Voltage	Seal Material	Body Material	Pipe Size	Orifice	Options
D	631	D	A20	N	31	11	02	
D= 3/2-Way Direct Acting	631= Normally Closed 632= Normally Open 634= Universal	D= Plastic molding coil N= Lead plastic forming coil	A24=AC24V A36=AC36V A48=AC48V A10=AC110V A20=AC220V D12=DC12V D24=DC24V D36=DC36V	N=NBR V=VITON E=EPDM	31=Forged brass	11= Plate combination type	02=2.0 R2=1.5 R3=2.5	L=Neon Lamp N=NPT Thread

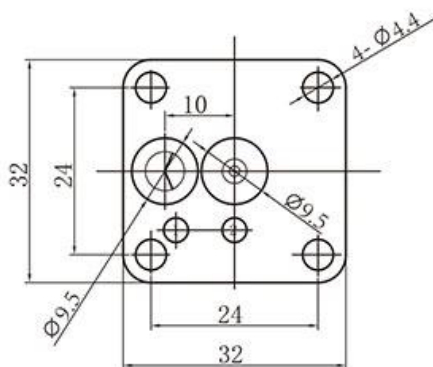


Product Characteristics

SLJ 3/2-way Series solenoid valve structure compact, Installed in integrated plate, Realize the piping to be not moved, Optional installation exchange solenoid valves, According to the requirement of customer mix of integration (At the same time, install 2/2-way and 3/2-way solenoid valve on one plate), This product widely used for cylinder、 valve etc implementation of the automatic control and air compressor

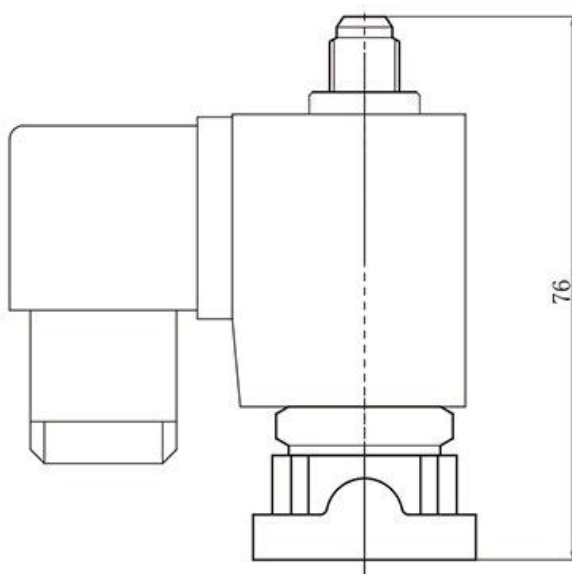

Valve Selection Lis

Pipe Size G	Orifice mm		Pressure (bar)				Coil Type	Power		Externsions Dimensions L × W × H	Weight KG	Model Code 220VAC 50/60HZ
			Air Gas		liquid		To confi gure	AC	DC			
	Valve body	TOP	AC	DC	AC	DC		220V	24V			
vers- ion	1.5	1.5	0-10	0-10	0-10	0-10	D	22	13	32×32×76	0.28	D632DA20N3111R2
	2.0	1.5	0-7	0-6	0-7	0-6	D	22	13	32×32×76	0.28	D632DA20N311102
	2.5	1.5	0-5	0-4	0-5	0-4	D	22	13	32×32×76	0.28	D632DA20N3111R3

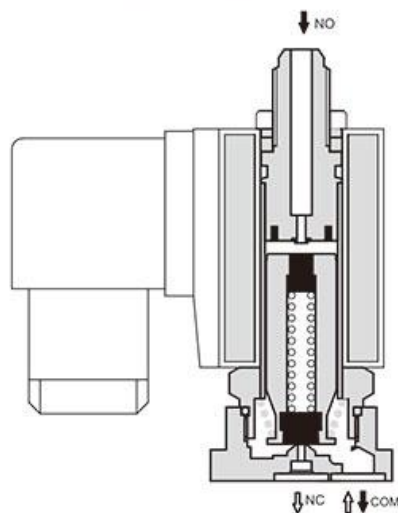

Normally open type